


NOTES:

- 1.) ASPHALT SHALL BE INSTALLED IN 2" LIFTS.

**ASPHALT SURFACE**

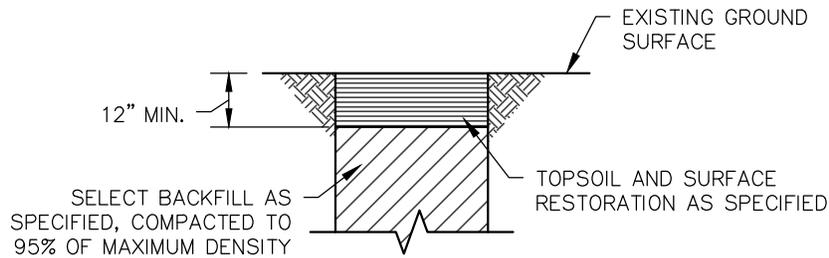

NOTES:

- 1.) MINIMUM LONGITUDINAL SPLICE OVERLAP SHALL BE 2' WITH A POST AT EACH END.
- 2.) SECURE FABRIC TO METAL POST.
- 3.) POST SHALL BE DRIVEN A MINIMUM OF 24" INTO GROUND.

**NON-PAVED AND NON-GRAVELED SURFACE**



**SHAFER, KLINE & WARREN, INC.**

216 N. Jefferson Avenue, Iola 66749-2943  
 620/365-5101 FAX: 620/365-6828

OFFICE LOCATIONS:

Chillicothe, MO	Iola, KS	Macon, MO
Columbia, MO	Kansas City, MO	North Kansas City, MO
Houston, TX	Lenexa, KS	Tulsa, OK

Designed By: DLC

Drawn By: HJP

Checked By: DLC

Issue Date: 09/2012

**SURFACE RESTORATION  
 DETAILS 1**